

FIG. 1

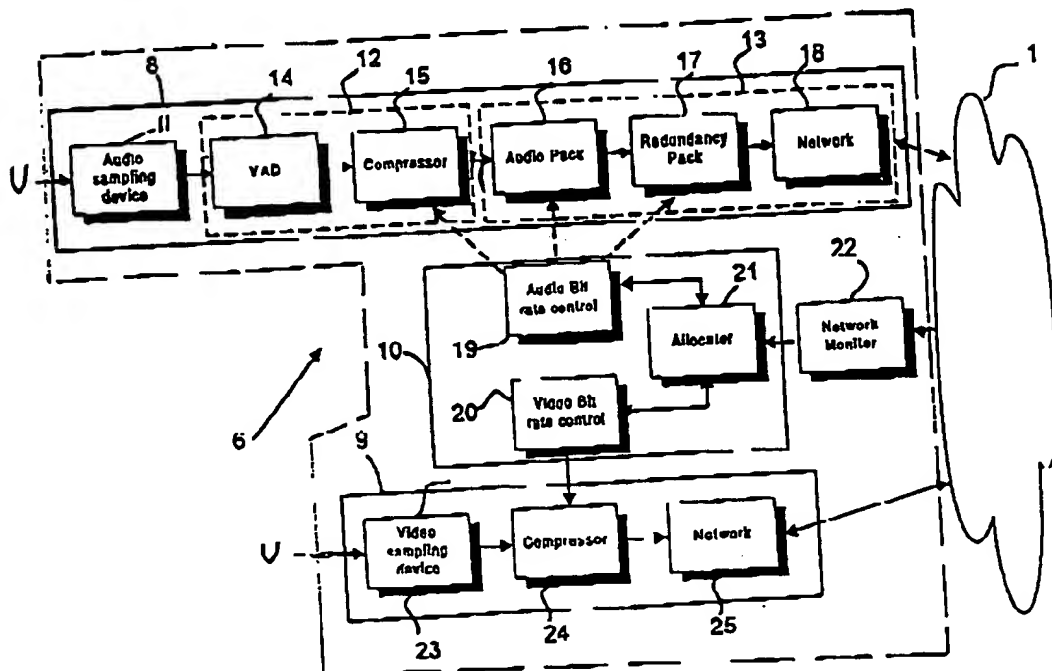


FIG. 2

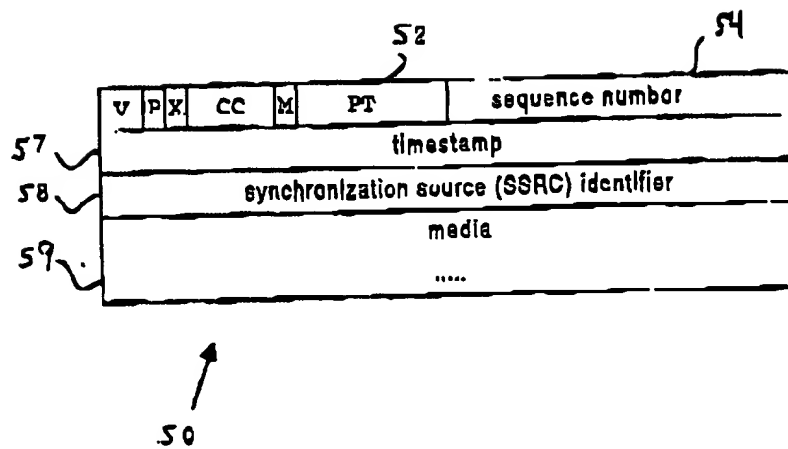


Fig. 3a

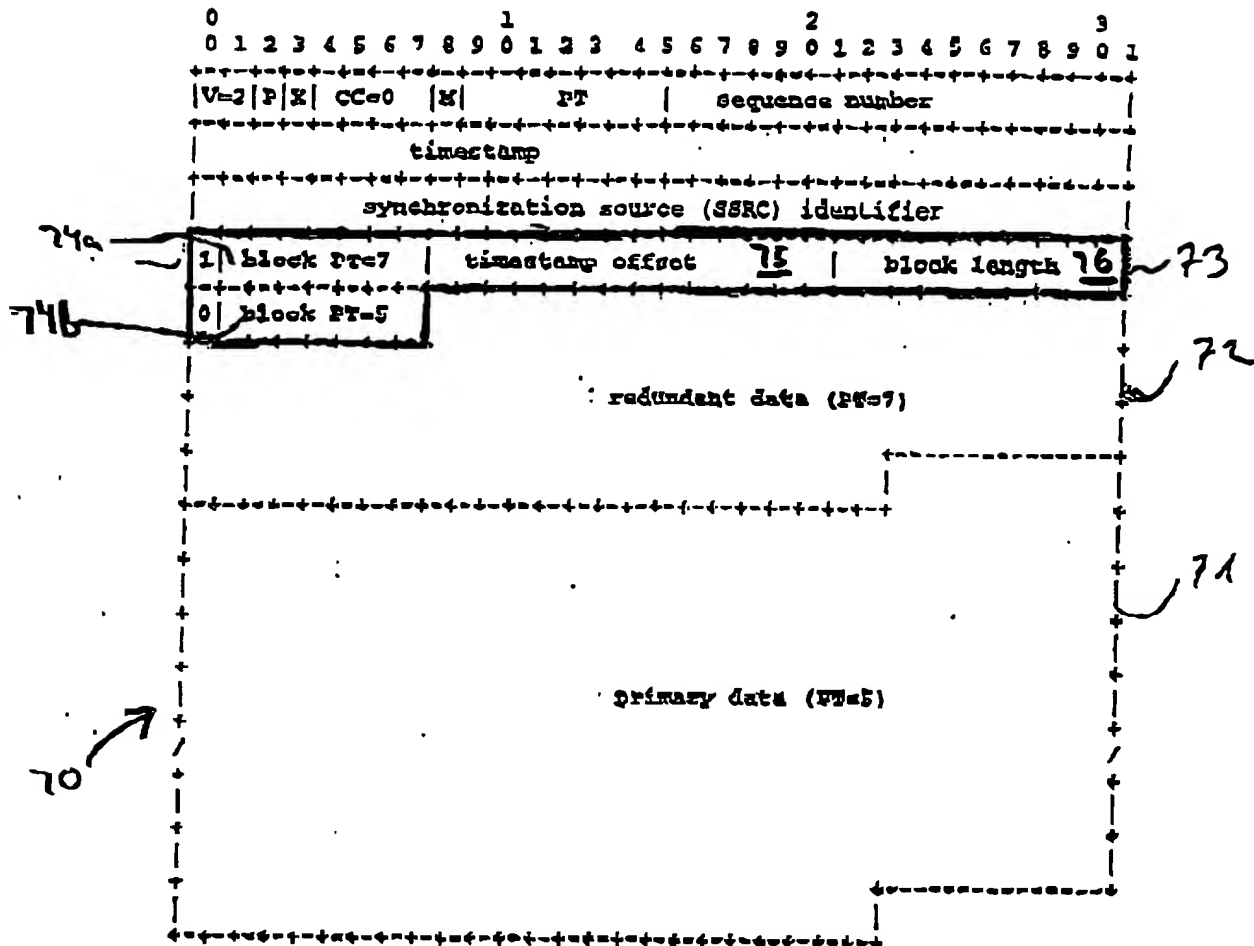


Fig. 3b

G.723	FR#	Redund	Regular	Loss	Delay	Loss+D.
9467	4	0	NS		S	
10489	3	0	NS	NS	S	NS
12533	2	0	S	NS		NS
18667	1	0	H			S
17333	2	1		S		S
19600	2	1		S		S
26400	1	1		H		H

Fig. 4

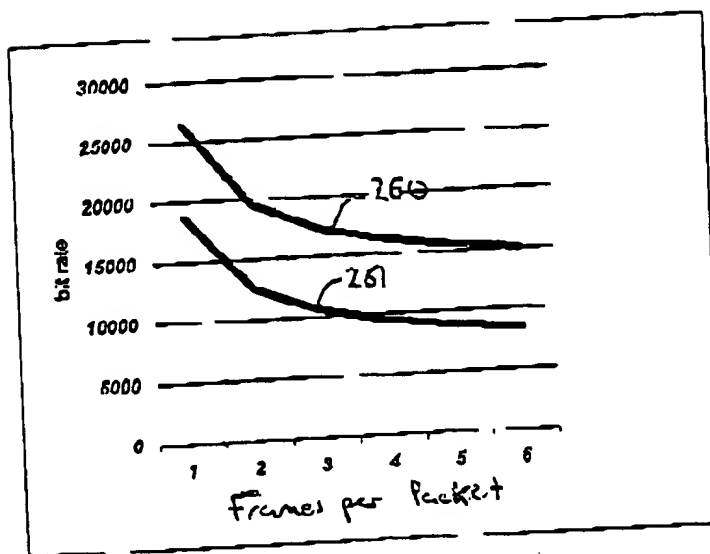
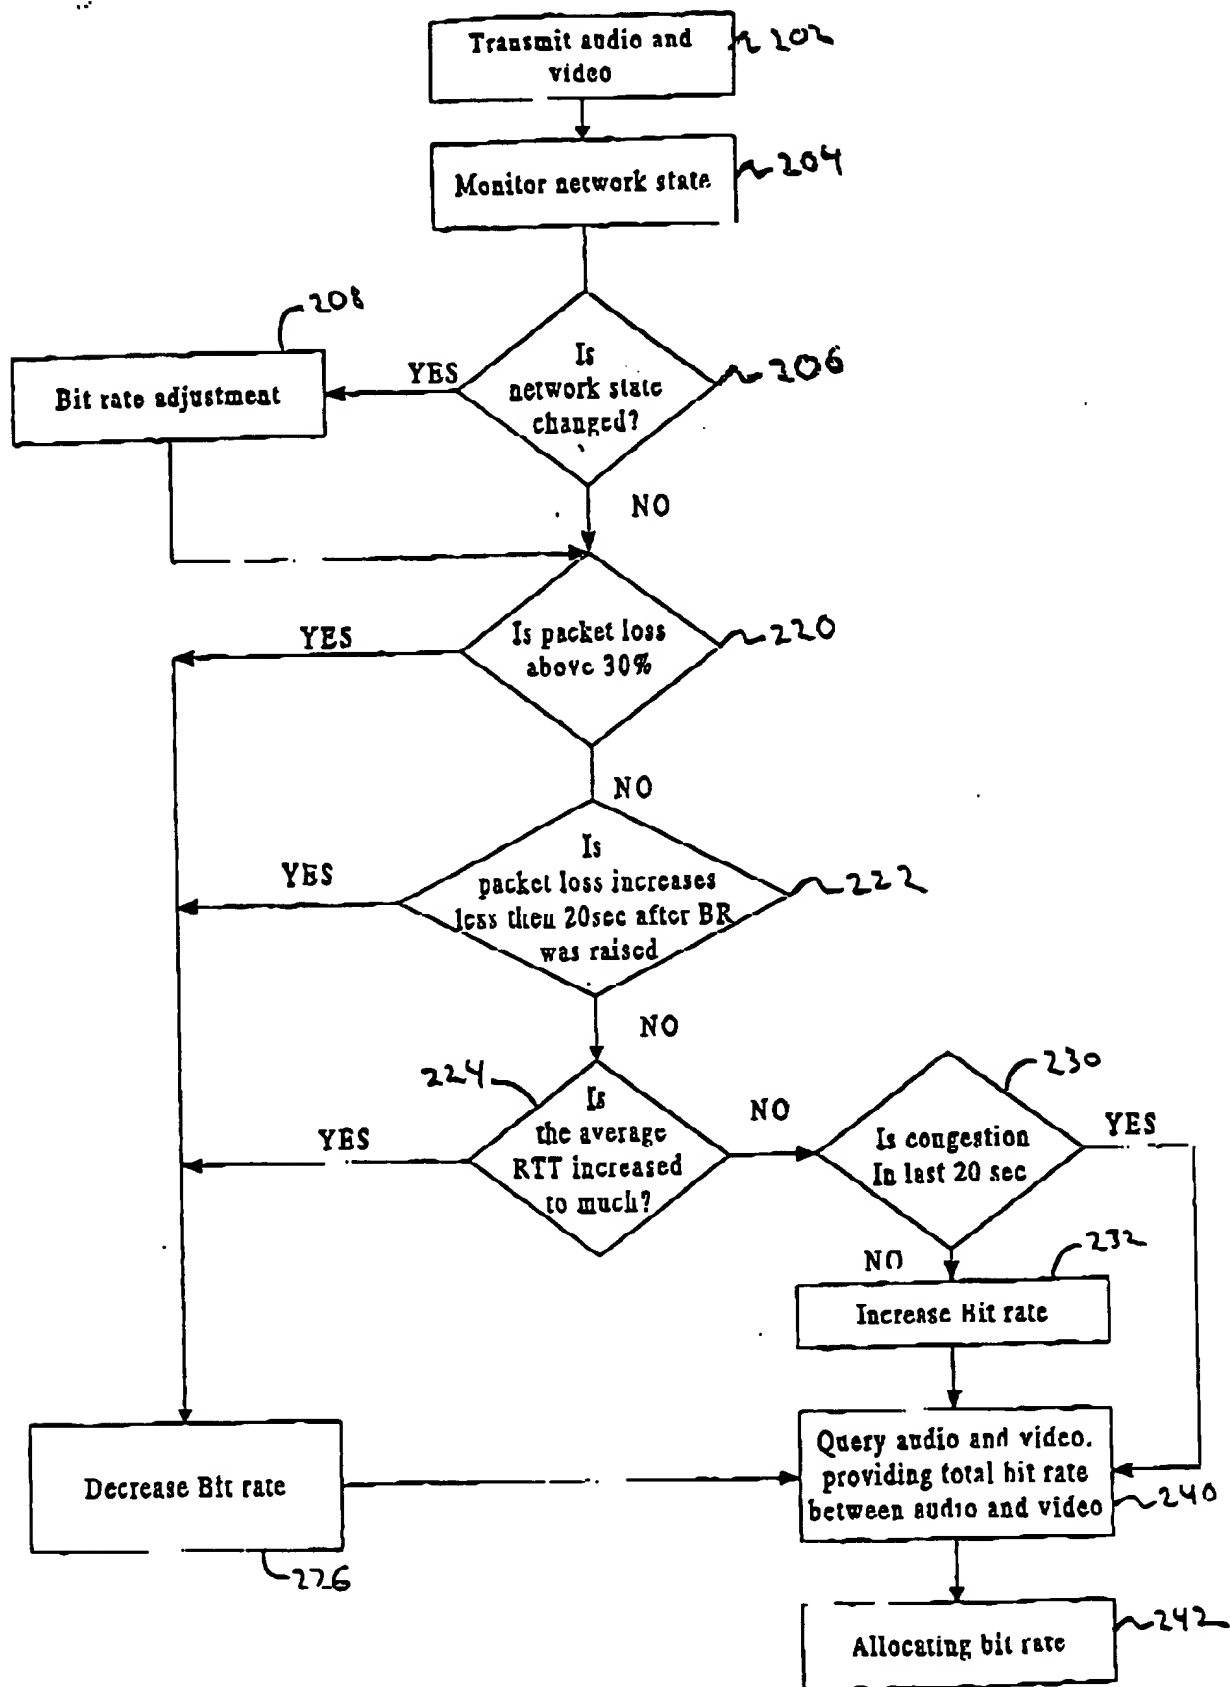


Fig. 6

		Frames in Packet					
		1	2	3	4	5	6
Bit		18667	12533	10489	9466.7	8853.3	8444.4
Rate		26400	19600	17333	16200	15520	15067

without redundancy (RFC 1879) (line 261 - Fig. 6)
 with redundancy (RFC 2198) (line 260 - Fig. 6)

Fig. 7

**FIG. 5**